

EAF 42


EBC 41

EL 41

ECH 42


243 A

SIERA

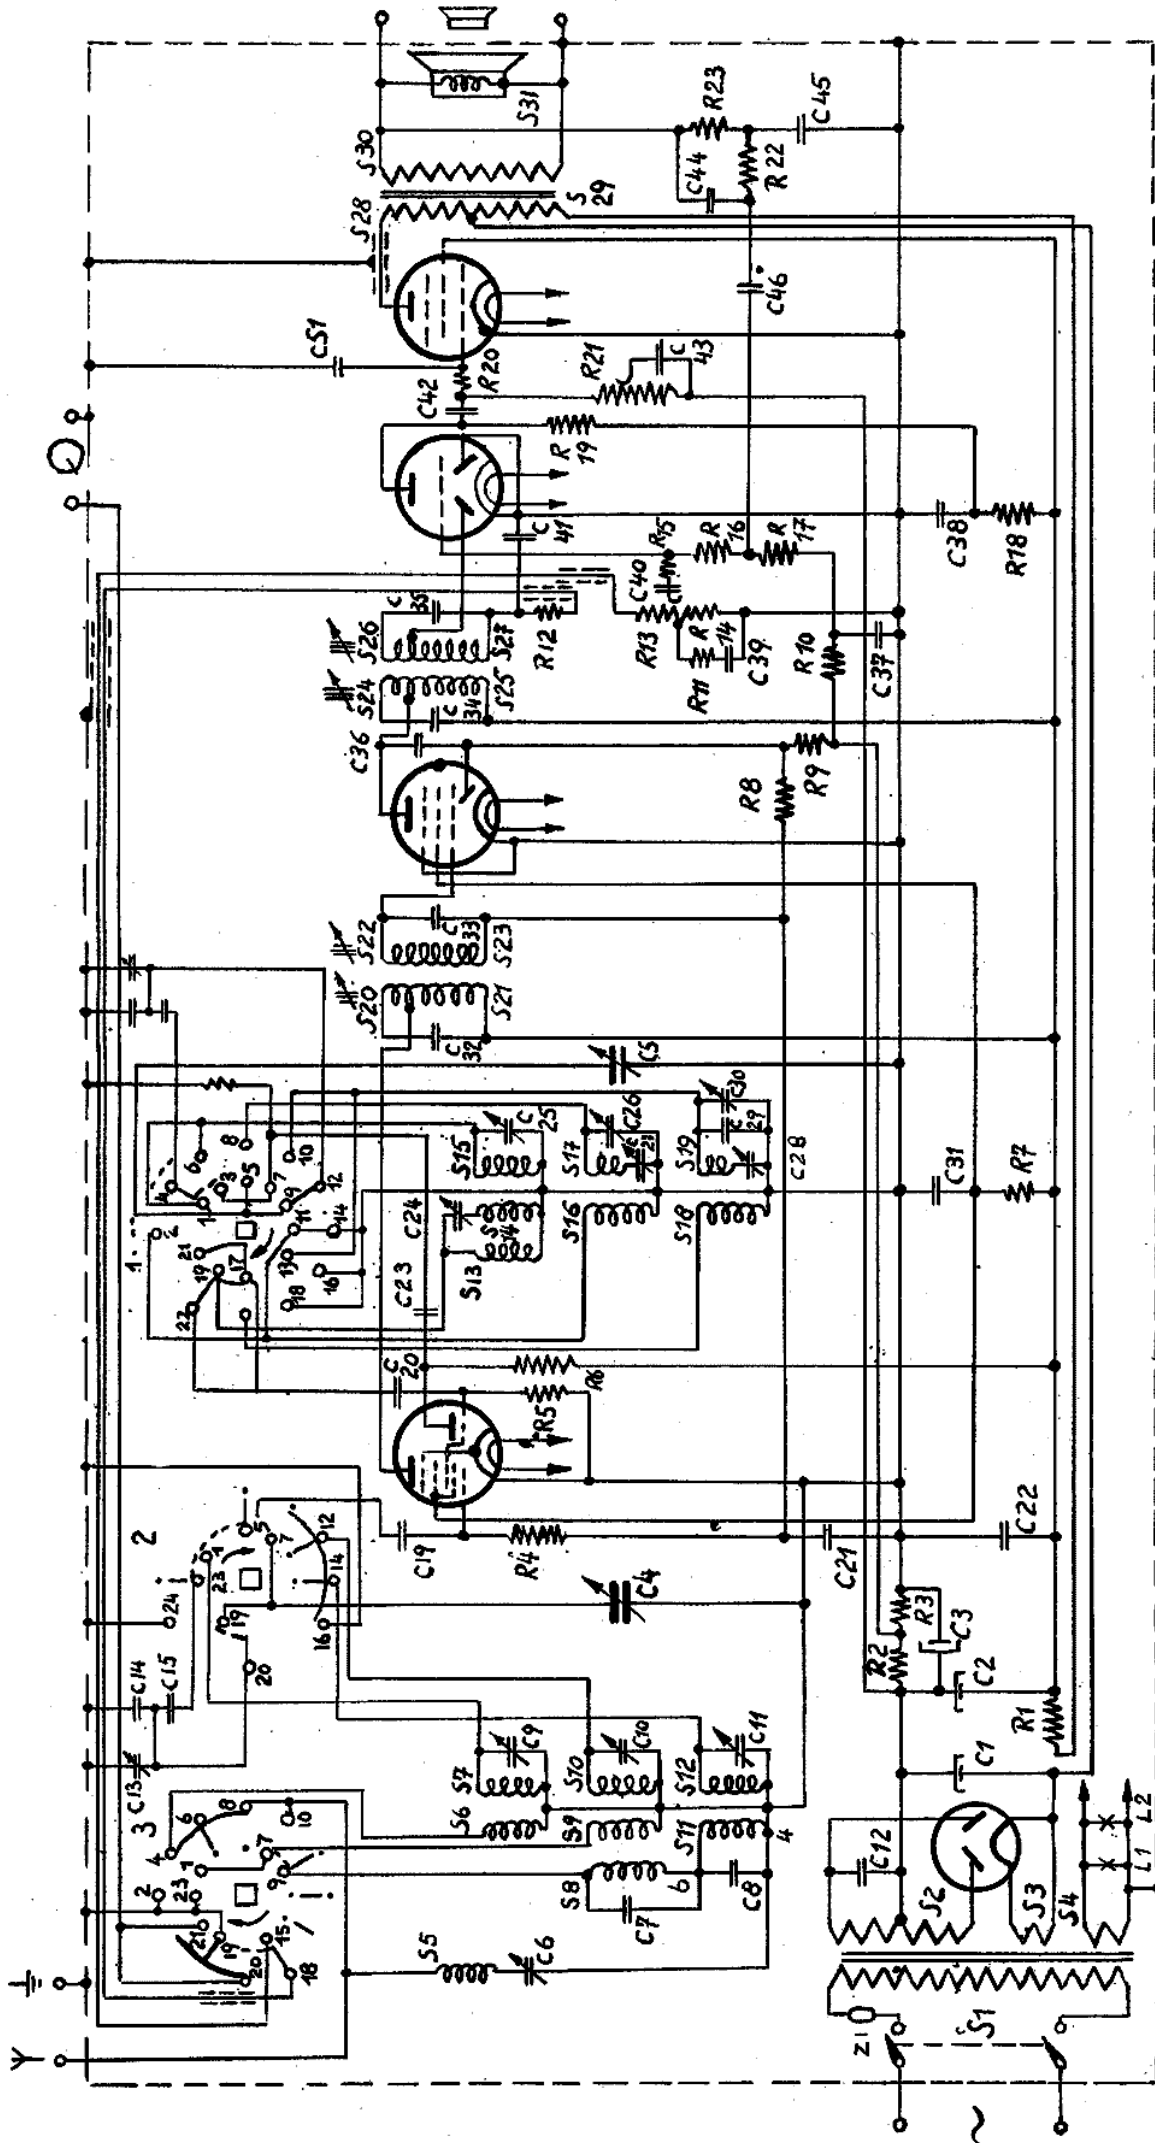

ZF = 452 kHz

AZ 41

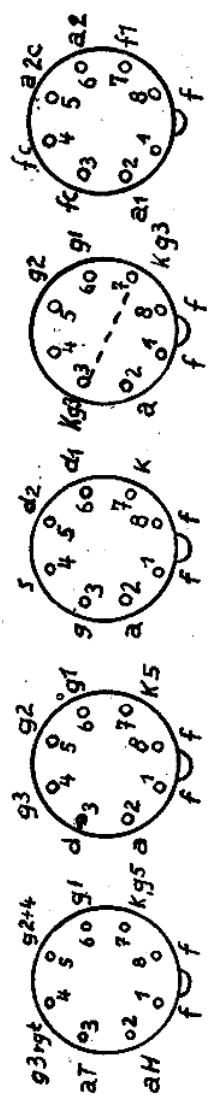

SPOELEN-COILS-BOBINES-SPULEN

S1			S16	4	Ohm	
S2			S17	7	Ohm	
S3		A3 141 63.1	S18	8	Ohm	A3 121 87.0
S4			S19	20	Ohm	
S5	34 Ohm		S20	3,2	Ohm	
S6	2,4 Ohm	A3 140 08.0	S21	4,5	Ohm	
S7	<1 Ohm	A3 121 88.0	S22	3,2	Ohm	A3 121 94.1
S8	50 Ohm	A3 111 77.0	S23	4,5	Ohm	
S9	2,4 Ohm		C32			
S10	5,5 Ohm	A3 121 86.0	C33			
S11	170 Ohm		S24	3,2	Ohm	
S12	42 Ohm		S25	4,5	Ohm	
S13	2 Ohm		S26	3,2	Ohm	A3 121 94.1
S14	1 Ohm	A3 121 89.1	S27	4,5	Ohm	
S15	<1 Ohm		C34			
			C35			
			S28	730	Ohm	
			S29	730	Ohm	A3 151 15.0
			S30	<1	Ohm	

CONDENSATOREN-CONDENSERS-CONDENSATEURS-KONDENSATOREN

C1	50 uF)	48 317 09/50+50	C24	175	pF	49 005 52.0
C2	50 uF)		C25	30	pF	28 212 36.4
C3	100 uF	28 185 68.0	C26	30	pF	28 212 36.4
C4	12-492 pF)	49 001 31.0	C27	400-575	pF	49 005 55.0
C5	12-492 pF)		C28	175	pF	49 005 52.0
C6	30 pF.	Zie spoelen, see coils, voir bobines siehe Spulen	C29	22	pF	48 406 10/22E
C7	6,8 pF	48 406 99/6E8	C30	30	pF	28 212 36.4
C8	39 pF	48 406 10/39E	C31	47000	pF	48 751 20/47K
C9	30 pF	28 212 36.4	C32	115	pF	Zie spoelen
C10	30 pF	28 212 36.4	C33	115	pF	See coils
C11	30 pF	28 212 36.4	C34	115	pF	Voir bobines
C12	22000 pF	48 758 20/22K	C35	115	pF	Siehe Spulen
C13	30 pF	28 212 36.4	C36	22	pF	48 406 10/22E
C14	96 pF	48 406 02/96E	C37	0,15	uF	48 750 20/150K
C15	235 pF	48 406 01/235E	C38	0,1	uF	48 751 20/100K
C16	96 pF	48 406 02/96E	C39	33000	pF	48 750 20/33K
C17	235 pF	48 406 01/235E	C40	22000	pF	48 750 20/22K
C18	30 pF	28 212 36.4	C41	47	pF	48 406 20/47E
C19	100 pF	48 406 20/100E	C42	22000	pF	48 751 20/22K
C20	33 pF	48 406 20/33E	C43	10000	pF	48 750 20/10K
C21	47000 pF	48 750 20/47K	C44	100	pF	48 406 10/100E
C22	47000 pF	48 751 20/47K	C45	680	pF	48 407 20/680E
C23	220 pF	48 406 20/220E	C46	2200	pF	48 751 20/2K2
			C51	47	pF	48 406 20/47E

WEERSTANDEN-RESISTANCES-WIDERSTANDE

R1	1200 Ohm	48 468 10/1K2	R13	0,275 MOhm		49 500 96.0
R2	100 Ohm	48 426 10/100E	R14	0,075 MOhm		
R3	33 Ohm	48 426 10/33E	R15	0,47 MOhm		48 425 10/470K
R4	0,82 MOhm	48 425 10/820K	R16	1,5 MOhm		48 426 10/1M5
R5	47000 Ohm	48 425 10/47K	R17	0,15 MOhm		48 427 10/150K
R6	33000 Ohm	48 427 10/33K	R18	0,82 MOhm		48 426 10/820K
R7	34000/2 Ohm	48 427 10/68K	R19	0,22 MOhm		48 427 10/220K
R8	1 MOhm	48 425 10/1M	R20	47000 Ohm		48 425 10/47K
R9	1 MOhm	48 425 10/1M	R21	0,5 MOhm		49 473 04.0
R10	1,5 MOhm	48 425 10/1M5	R22	0,18 MOhm		48 425 10/180K
R11	10000 Ohm	48 425 10/10K	R23	0,22 MOhm		48 425 10/220K
R12	56000 Ohm	48 425 10/56K	R24	68000 Ohm		48 425 10/68K